



# Hydraulic Coupler Size Chart

## MEASUREMENT INSTRUCTIONS:

1. Inspect and determine the type of fittings affixed to the end of the hoses attached to your 3<sup>rd</sup> function valve. Based on the images below, you should evaluate which coupler style you need from the three options: Flat Face (+\$50), Ball, or Poppet.
2. Based upon the fittings for your 3<sup>rd</sup> function, you will need the matching set for your hydraulic implement. If you have two male ball-style couplers, you will need two female ball-style couplers to match.
3. Using a tape measurer or ruler, you must measure the top of the fittings to determine the body size required for your attachment fittings. Use the references below to assess which size coupler you need. If you do not see your size/dimensions listed below, please call our Sales Team at 833-625-0635 to inquire about the availability of other sizes or adapters.
4. Homestead Implements only carry the below couplers as available options for all hydraulic equipment. Our standard fitting is a 1/2" Ball Style Coupler. Should you require a different style or size fitting, don't hesitate to contact your tractor dealer or visit your local tractor supply store to purchase the correct fittings to match your tractor. Homestead Implements will ship your hydraulic implement without fittings and credit \$20 back to your order via your payment method.
5. If you are unsure which fittings your tractor requires, please get in touch with our Sales Team for assistance in measuring your couplers before placing your order. *(Coupler images shown are not true to size.)*

## Flat Faced - 1/2"



MALE



FEMALE



M



F

# Ball



MALE



FEMALE



1/2"



3/8"



1/4"


# Poppet



MALE



FEMALE

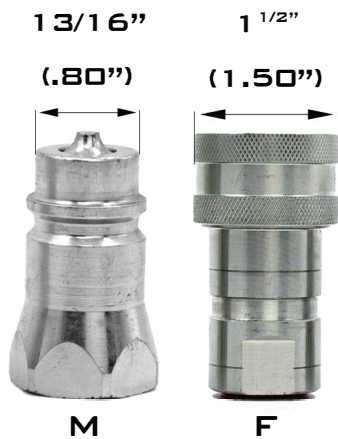

1/2"



3/8"



1/4"