
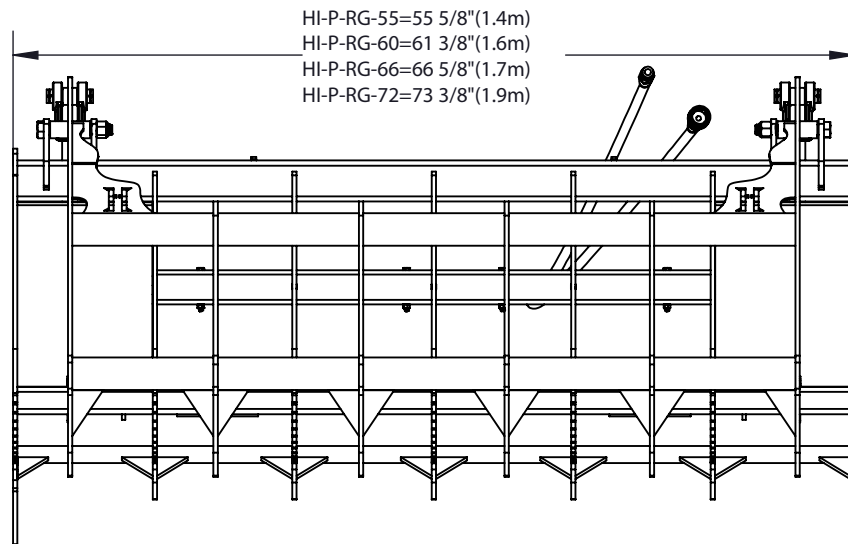


Homestead Implements Pinnacle Series Root Grapple

Technical Specification

| Model Numbers | HI-RG-55 | HI-RG-60 | HI-RG-66 | HI-RG-72 |
|----------------------------|---|--|---|---|
| Weight | 302 lbs. (137 kg) | 312 lbs. (141 kg) | 325 lbs. (147 kg) | 366 lbs. (166 kg) |
| Overall Width | 55 5/8" (1.4m) | 61 3/8" (1.6m) | 66 5/8" (1.7m) | 73 3/8" (1.86 m) |
| Closed Height | 34 3/16" (86.8cm) | | | |
| Maximum Jaw Opening | 39 1/2" (100.3cm) | | | |
| Number of Teeth | 7 Bottom & 6 Top | | | 9 Bottom & 8 Top |
| Teeth Spacing | 8 7/8" (22.6cm) on bottom teeth and | 9 7/8" (25.1cm) on bottom teeth and | 10 3/8" (26.4cm) on bottom teeth and | 8 7/8" (22.5 cm) on bottom teeth and |
| | 8 7/4" (22.6cm) on the top teeth | 10 1/4" (26.1cm) on the top teeth | 11 1/2" (29.2cm) on the top teeth | 9" (22.86 cm) on the top teeth |
| Tooth Thickness & Material | 5/16" (7.9mm), HARDOX® 450 | | | |
| Length of Teeth | 12 7/8" (32.7cm) | | | |
| Hydraulic Cylinder(s) | 2" (5.1cm) x 6"(15.2cm) x 1 1/8"(2.8cm) Rod, 2 Nos. | | | |
| Maximum Pressure Rating | 3000 PSI | | | |
| Hose Size & Connector | 3/8" (9.5mm) ID with JIC flare fitting | | | |
| Hose Size (tractor) | 1/2" (12.7mm) ID with NPT threading | | | |
| Recommended Tractor HP | Up to 55HP | | Up to 60HP | |
| Hitch Attachment | Universal Quick-Attach (SSQA) | | | |

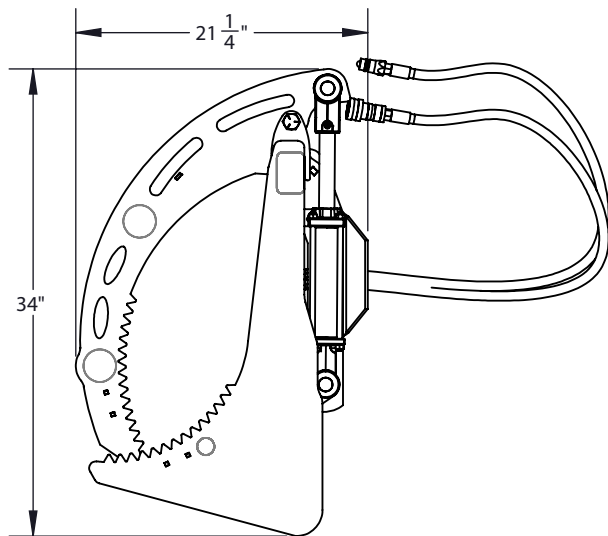

CUSTOMER APPROVAL :

DATE :



THIS DRAWING, WHICH CONTAINS PROPRIETARY INFORMATION, IS THE PROPERTY OF JAMESTOWN ADVANCED PRODUCTS CORPORATION. IT SHALL NOT BE REPRODUCED IN ANY MANNER NOR DISCLOSED TO THIRD PARTIES WITHOUT WRITTEN PERMISSION OF JAMESTOWN ADVANCED PRODUCTS CORPORATION.

DATE : **04/20/2022**

PRODUCT PART NUMBER : HI-P-RG

REV. NO.

PRODUCT DESCRIPTION :
PINNACLE ROOT GRAPPLE

2855 GIRTS ROAD
JAMESTOWN, NY 14701

PHONE 833-625-0635 -- FAX 716-483-5398 -- WWW.HOMESTEADIMPLEMENTS.COM